

# PowerMax™ CELLULAR ANTENNAS



## REPEATER INSIDE ANTENNA

3 dB GAIN DUAL BAND | 135-RD




Digital Antenna's PowerMax™ dual band 3 dB gain Inside Antenna offers convenient placement and excellent performance. The unique pivoting swivel base and two counter sunk mounting holes allow the antenna to be attached to a wall or flat surface. Six feet of cable allows the antenna to be conveniently located. (mounting screws not included)

Digital Antenna's cellular antennas are precision engineered and hand tuned for maximum gain. With a perfect 50 ohm match, they deliver high performance and maximum signal integrity. Ideal for use with a PowerMax™ amplifier or repeater to ensure reliability and the clearest cellular communication.

### 135-RD Dual Band Inside Antenna

Use	Inside Homes, offices, boats and RVs
Bandwidth VSWR	<1.5:1: 810-950 and 1800-1980 MHz
Maximum Input Power	50 watts
Impedance	50 ohm
Gain	3dB
Connector	Mini-UHF male
Cable	6' RG174
Mount	Swivel base for wall or flat surface
Dimensions	4" l x 2.5" OD max

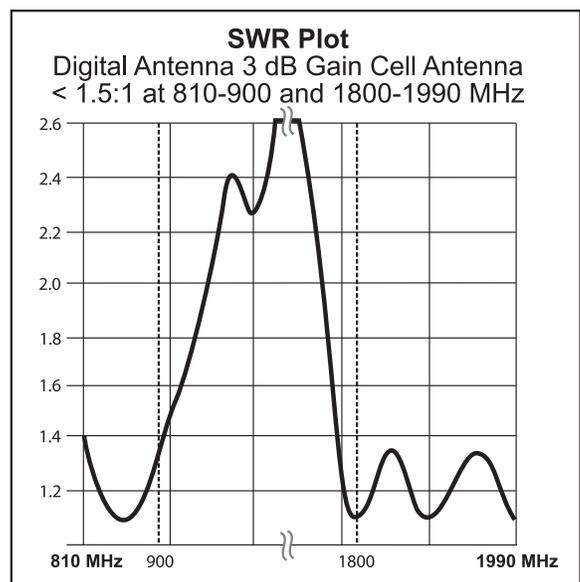

Digital Antenna, Inc.  
www.digitalantenna.com

5325 NW 108th Avenue  
Sunrise, FL 33351

t 954.747.7022  
f 954.747.7088