

# PowerMax™ MULTI-BAND ANTENNAS



**DIGITAL  
ANTENNA**

**CEILING MOUNT ANTENNA**

**3 dB GAIN MULTI-BAND | 433-CM**



Digital Antenna's multi-band ceiling mount antenna is designed to be mounted indoors on a suspended ceiling having either flush or recess mounted ceiling tiles. This 3 dB gain ceiling mount antenna adds an attractive low profile appearance to a repeater installation. Ideal for use with all Digital Antenna PowerMax™ 4KSBR-50U and 4KMR-30U repeaters. Also for use with 2.5 GHz WiFi systems.


Model #433-CM, ceiling mount antenna, gives 360° coverage in the horizontal plane with a down directed vertical beam width of 60°.

## 433-CM Multi-Band Ceiling Mount Antenna

<b>Use</b>	Inside homes, offices and commercial buildings
<b>Bandwidth VSWR</b>	<1.5:1: 824-894, 1850-1990 and 2400-2500 MHz
<b>Maximum Input Power</b>	50 watts
<b>Impedance</b>	50 ohm
<b>Gain</b>	3dB
<b>Connector</b>	Type N female
<b>Mount</b>	Ceiling
<b>Beam Width</b>	H 360° V 60°
<b>Dimensions</b>	6.8" OD x 3.6" h
<b>Weight</b>	.7 lbs
<b>Cable</b>	12" low-loss DA240

### SWR Plot

Digital Antenna 3 dB Gain Multi-Band Antenna  
< 1.5:1 at 824-894, 1800-1990 and 2400-2500 MHz

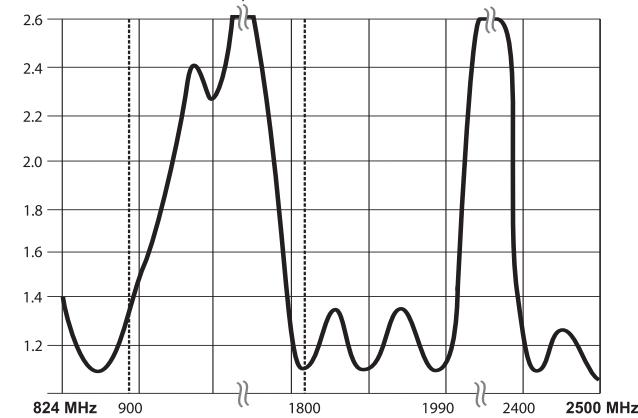

Digital Antenna, Inc.  
[www.digitalantenna.com](http://www.digitalantenna.com)

5325 NW 108th Avenue  
Sunrise, FL 33351

► t 954.747.7022  
► f 954.747.7088